

BREMSKERL 7381

Material description

metal free, less flex, grey-black, Rubber-resin-bonded, asbestos-free

Availability

pads moulded to customer drawings

Applications

Brakes and clutches for usual mechanical engineering

Technical Data

mean friction coefficient μ (dry) for design purposes	0,38
recommended range of performance:		
p max [N/cm ²]	120
v max [m/s]	20
Max. application temperature [°C]		
continuously	300
intermittently	350
Hardness at 20°C	ISO 2039-1 [N/mm ²]	approx. 45
Tensile strength at 20°C	ISO 527 [MPa]	approx. 6
Impact strength at 20°C	DIN 179-1 [kJ/m ²]	approx. 5
Specific weight	DIN 53479 [g/cm ³]	2,1
Bondability	good


Can be used in oil-immersed applications, dependent on oil type, occasional splashes not detrimental

The maximum pressure / temperature / speed should not occur simultaneously.
This information is advisory and is to our best knowledge.
All the physical properties shown above are mean values.


Friction characteristics

BREMSKERL


Der Spezialist für Brems- und Kupplungsbeläge
The specialist for brake and clutch linings

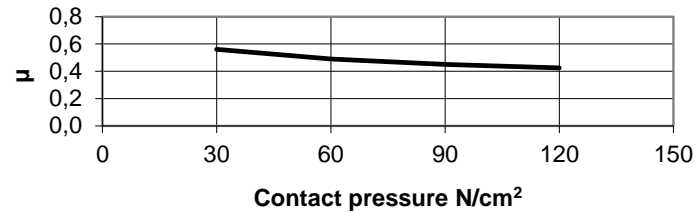


$v = 6$ m/s
 $T = 150$ °C

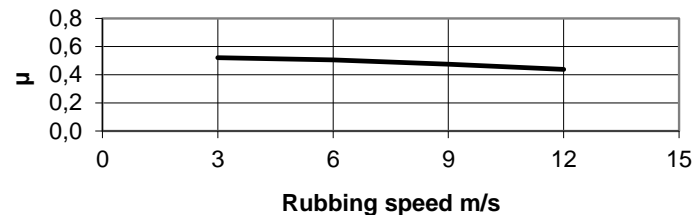

$p = 60$ N/cm²
 $T = 150$ °C

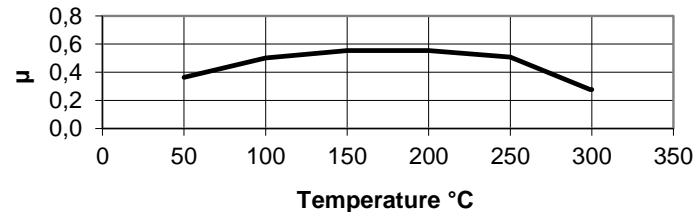

Continuous braking
 $v = 6$ m/s
 $p = 60$ N/cm²

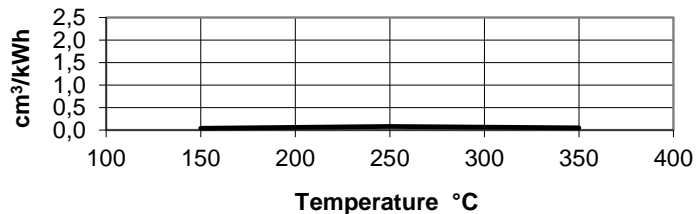

spec. wear rate
 $v = 15$ m/s
 $p = 50$ N/cm²

Test conditionen: sample size: 2x5 cm², counter material: EN-GJL-250, disc brake

The friction coefficients determined by small-scale brake lining tests may not be compatible to practice and further tests may be required.